

## WT-RC□□-T

### ■ SPECIFICATIONS

- Excellent Filtering
- TAB Terminals
- economically most usings
- Confidency by Epoxy Coverage

### ■ APPLICATIONS


- Digital Equipments
- Personal Computer and peripherals
- Measuring and Medical Equipments
- Commumication Equipments
- Industrial Equipments



### ■ SPECIFICATIONS

| MODEL                 | WT-RC02-T  | WT-RC03-T | WT-RC06-T |
|-----------------------|--|-----------|-----------|
| RATED CURRENT         | 2A   | 3A        | 6A        |
| RATED VOLTAGE         | 250 VAC  |           |           |
| TEST VOLTAGE          | 1,500V 10mA between I/O terminals and Earth for 1 minute |           |           |
| INSULATION VOLTAGE    | 500VDC 300Mohm between I/O terminals and case            |           |           |
| LEAKAGE CURRENT       | 0.5mA Max  |           |           |
| TEMPERATURE RISE      | 30°C Max   |           |           |
| OPERATING TEMPERATURE | -25 ~ +85°C  |           |           |

### ■ Block Diagram

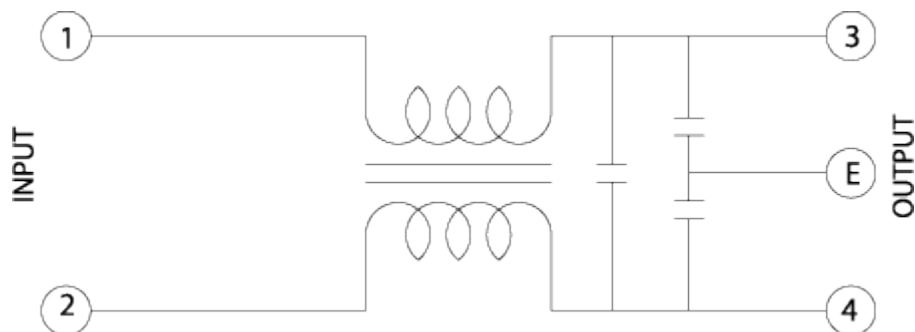

### ■ Dimensions (Units:mm)