Ø100mm Xenon Lamp Strobe Signal Lights

S100 Series

PRODUCT SPECIFICATION

S100S | S100SM

Materials Lens-AS, Housing-ABS Ambient operating temperature -30°C to +50°C Protection rating IP54 Flashing rate 60-80/min

- Ø100mm xenon lamp strobe signal lights
- High efficiency strobe light that offers excellent outdoor visibility and longdistance signal light luminance close to natural light
- Lamp connector structure for convenient lamp replacement

S100S Xenon Lamp Strobe Signal Lights


Model number	Voltage	Current	Xenon lamp			Contification	Weight	Color
			Spec	Standard	Parts no	Certificates	weight	Color
S100S	DC12V -24V	Max. 1.300A	200V -550V	EUB0641 -1A(G) U Type	48	CE	0.25kg	 R-Red A-Amber G-Green B-Blue
	AC110V	0.160A						
	AC220V	0.140A						

※ CE Compliant: DC12V-24V

S100SM Xenon Lamp Strobe Light Equipped with Magnet

Model number	Voltage	Current	Xenon lamp			Contification	Weight	Color
			Spec	Standard	Parts no	Certificates	Weight	Color
S100SM	DC12V -24V	Max. 1.300A	200V -550V	EUB0641 -1A(G) U Type	48	CE	0.34kg	 R-Red A-Amber G-Green B-Blue

Wiring Instructions External Power line(S100S) - UL1015 AWG18(0.75sq) x 2C 400mm
External Power line(S100SM) - Cigarette lighter plug, IEC42(0.75sq) x 2P 2m
This product can be wired regardless of polarity.

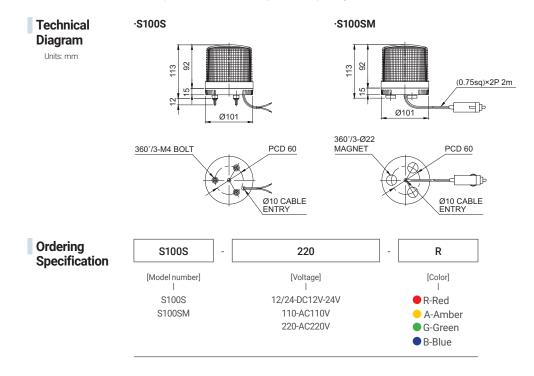



٥٥٥

IP54

¶+50°c -30°c

NS

MAGNET

S100S



S100SM



Xenon lamp replacement instructions Convenient lamp replacement with connector lamp type. Lamp replacement is safe after the product is Powered off for 30 mins.

Customization

- · AC Type(S100SM)
- Wall mount bracket options(S100S) : Bracket structure allows for
- threading through the bracket hole or into the wall mount



Wall Mount

Wall Mount Bracket SWP125

Bracket SWM125